

S32G

S32G Vehicle Integration Platform (GoldVIP)

Rev. 3.0 — 7 August 2026

Product brief

1 Software Product Overview

GoldVIP provides a reference software integration platform for vehicle network processing applications like vehicle computers and service-oriented gateways. It streamlines S32G hardware evaluation and accelerates software development with ease-of-use, hardware abstraction, software integration and visualization.

GoldVIP provides out-of-the-box integration of open-source software components and third-party software on top of the S32G software ecosystem, offering both AUTOSAR™ and Linux® rapid development and sample applications. The key value propositions of the S32G hardware accelerators are showcased through example use cases, fast deployment and visualization.

The targeted use cases include, but are not limited to:

- CAN and Ethernet data routing with and without acceleration and Intrusion Detection and Prevention functionalities;
- Connected vehicle including over-the-air (OTA) updates and Vehicle-to-Cloud support using AWS IoT Greengrass;
- In-vehicle services deployment with support for virtualization and containers;
- Vehicle network processing applications, network security and security services;

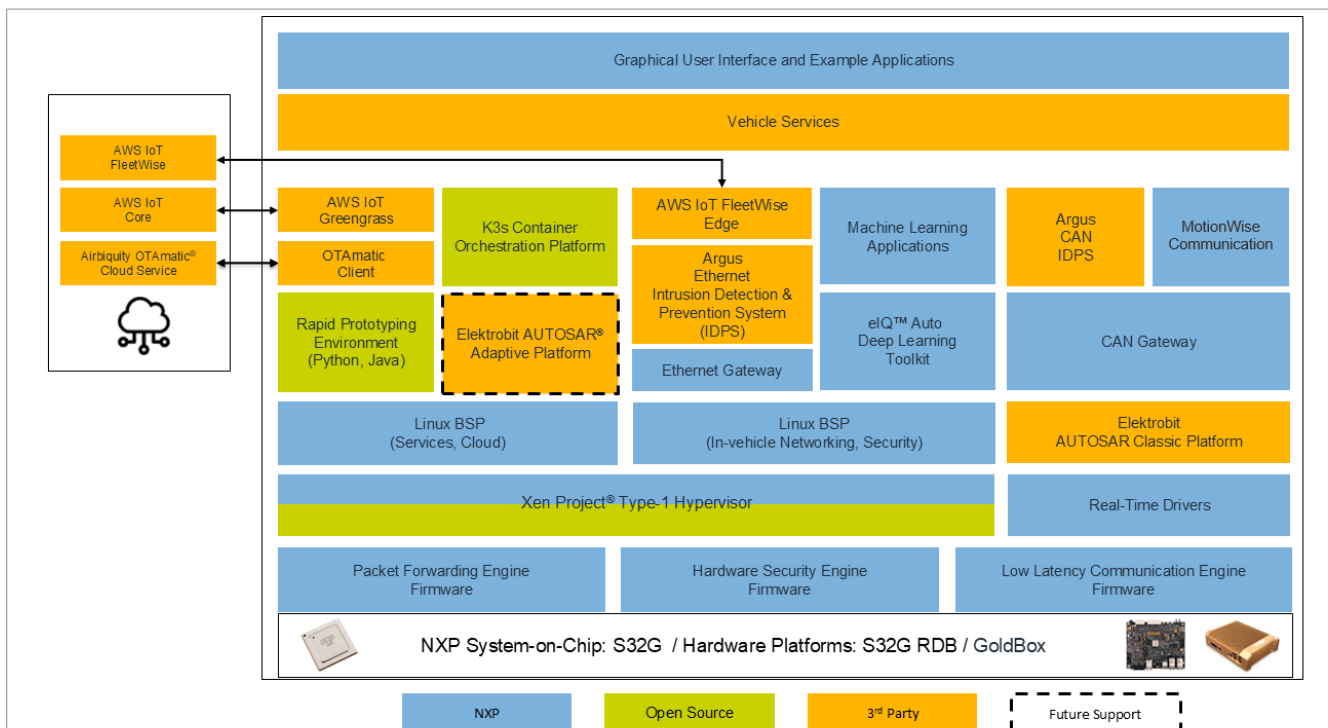


Figure 1. S32G Vehicle Integration Platform (GoldVIP) Block Diagram



2 Software Content

This section contains a description of the modules integrated in the GoldVIP deliverable:

- Linux BSP
- Low Latency Communication Engine (LLCE) driver and standard firmware
- Packet Forwarding Engine (PFE) driver and standard firmware
- Real-Time Drivers (RTD)
- Inter-Platform Communication Framework (IPCF)
- Hardware Security Engine standard firmware
- System-Level Bootloader Integration Example
- S32 Safety Software Framework (SAF)
- SJA1110 Ethernet Switch standard firmware and telemetry application
- Yocto Project® support
- AWS IoT Greengrass
- AWS IoT FleetWise
- Argus IDPS
- EB tresos AutoCore
- Airbiquity OTAmatic® Software
- K3s Kubernetes Distribution
- Docker® Engine

2.1 Linux BSP

NXP Automotive Linux BSP follows the general layout of a BSP, containing a bootloader (U-Boot), a hypervisor (Xen® Project), Arm® Trusted Firmware (ATF), the Linux kernel, a root file system, which can contain various libraries and middleware, and sample applications. The objective is to enable more hardware platforms, to build on top of the NXP Automotive Processing (AP) Linux BSP and add supplemental components such as drivers or applications.

2.2 Low Latency Communication Engine (LLCE) driver and standard firmware

The Low Latency Communication Engine (LLCE) controls the traditional automotive communication interfaces such as CAN, LIN, and FlexRay™. The LLCE offloads the Host CPU from all interface level tasks, while maintaining performance and compatibility with the AUTOSAR standard. LLCE enablement consist of binary images for the code running on each of the LLCE cores. The firmware services are integrated into the AUTOSAR Communication stack via AUTOSAR MCAL drivers that are provided by NXP.

2.3 Packet Forwarding Engine driver and standard firmware

The Packet Forwarding Engine (PFE) consists of three software components: PFE Firmware, Ethernet drivers, Configuration API – FCI (Fast Control Interface). The PFE is capable of offloading the computing intensive operations of Ethernet packet routing from the application cores, while providing a high degree of configuration through the FCI.

2.4 Real-Time Drivers

The Real-Time Drivers (RTD) is a set of AUTOSAR compliant device drivers responsible for hardware abstraction and enablement of the NXP devices. The Complex Device Drivers provided on top of the required AUTOSAR drivers create a rich ecosystem for developers and applications.

2.5 Inter-Platform Communication Framework

The Inter-Platform Communication Framework (IPCF) is a subsystem which enables applications, running on multiple homogenous or heterogenous processing cores, located on the same chip or different chips, running on different operating systems (e.g., AUTOSAR, Linux, FreeRTOS™), to communicate over various transport interfaces.

2.6 Hardware Security Engine standard firmware

The Hardware Security Engine (HSE) is an NXP dedicated security core that runs secure firmware. The HSE enables offloading of the most common security algorithms from the CPU to the dedicated hardware, key storage, secure boot, while serving as a secure enclave. The HSE Security (standard) Firmware is delivered in executable form, encrypted and signed by NXP.

2.7 System-Level Bootloader Integration Example

The System-Level Bootloader Integration prepares the system to be able to execute code by loading application images from Non-Volatile Memory to RAM. The bootloader prepares the system partitioning for the applications, ensures data integrity using the HSE and performs a safety check on the system using the SAF.

2.8 S32 Safety Software Framework

The S32 Safety Software Framework (SAF) is a software product containing software components for establishing the safety foundation for customer's safety applications compliant with ISO 26262 functional safety. It allows integration up to ASIL D automotive safety integrity level.

2.9 SJA1110 Ethernet Switch standard firmware and telemetry application

The NXP SJA1110 is a family of four, pin-compatible and software-compatible automotive Ethernet Switch SoC offering a scalable solution for all automotive applications. All SJA1110 variants come with hardware-assisted security and safety capabilities, multi-gigabit SGMII interfaces and the latest AVB and TSN standards. In one of GoldVIP telemetry use cases, a telemetry application making use of AWS IoT Greengrass which was added on top of the standard SJA1110 firmware to allow statistics from the Ethernet Switch to be sent to the cloud.

2.10 Yocto Project

The Yocto component is responsible for providing a way of building all GoldVIP components and tools necessary to create the binary images that run on the target NXP hardware. It gives developers and clients the flexibility to supplement the provided images with other tools, binaries and utilities that should be part of the final root file system on the target hardware.

2.11 AWS IoT Greengrass

AWS IoT Greengrass is an Internet of Things (IoT) open source edge runtime and cloud service that helps you build, deploy, and manage device software.

2.12 AWS IoT FleetWise

AWS IoT FleetWise makes it easier to collect, transform, and transfer vehicle data to the cloud in near real time and use that data to improve vehicle quality, safety, and autonomy.

2.13 Argus IDPS

Argus Intrusion Detection Prevention System monitors and analyzes in-vehicle network communication in real time to detect cyber security attacks and suspicious network activity. Argus network protection uses various techniques, such as deep packet inspection and timing and context analysis, to provide accurate, detailed alerts of suspicious events in CAN and Ethernet networks.

2.14 EB tresos AutoCore

EB tresos AutoCore is an industry-leading implementation of AUTOSAR-compliant basic software for automotive electronic control units (ECUs). This versatile solution is based on AUTOSAR 4.x. It provides a modular and extensible framework and is a perfect software base for developing innovative ECU software applications.

2.15 Airbiquity OTAmatic Software

Airbiquity OTAmatic software is an automated and secure Over-The-Air (OTA) service delivery tailored for automotive applications. It consists of three main software components: OTAmatic Server, Client and Agent. These three components operate in a secure and safe manner ensuring A/B swap capabilities and data integrity.

2.16 K3s Kubernetes Distribution

K3s is a highly available, certified Kubernetes distribution designed for production workloads in unattended, resource-constrained, remote locations or inside IoT appliances.

2.17 Docker Engine

A Docker image recipe is provided, containing demo scripts for ease of use and a Graphical User Interface (GUI) ready to be deployed on an Ubuntu™ target. This ensures an Out-Of-The-Box-Experience for the user and provides a lot of insight into the S32G and its capabilities for developers.

3 Supported Targets

The software described in this document is intended to be used with the NXP Semiconductors S32G devices.

Hardware platforms supported:

- S32G Reference Design Board 2 (RDB2) - (S32G-VNP-RDB2)
- S32G Reference Design Board 3 (RDB3) - (S32G-VNP-RDB3)
- S32G2 GoldBox - (S32G-VNP-GLDBOX)
- S32G3 GoldBox 3 - (S32G-VNP-GLDBOX3)

4 Quality, Standards Compliance and Testing Approach

The GoldVIP product is developed according to NXP Software Development Processes that are Automotive-SPICE (tailored for open source), IATF16949 and ISO 9001 compliant.

5 Revision History

This table summarizes the changes done to this document since the initial release.

Table 1. Revision history

Document ID	Release date	Description
S32G_PB.v.3.0	7 August 2026	• Replace the RTI component with MotionWise Communication • Aligned the GoldVIP documentation to NXP guidelines
S32G_PB.v.2.0	28 February 2023	Update Software Content and Supported Targets chapters
S32G_PB.v.1.0	28 February 2022	Initial release

Legal information

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

Contents

1	Software Product Overview	1
2	Software Content	2
2.1	Linux BSP	2
2.2	Low Latency Communication Engine (LLCE) driver and standard firmware	2
2.3	Packet Forwarding Engine driver and standard firmware	2
2.4	Real-Time Drivers	2
2.5	Inter-Platform Communication Framework	3
2.6	Hardware Security Engine standard firmware	3
2.7	System-Level Bootloader Integration Example	3
2.8	S32 Safety Software Framework	3
2.9	SJA1110 Ethernet Switch standard firmware and telemetry application	3
2.10	Yocto Project	3
2.11	AWS IoT Greengrass	3
2.12	AWS IoT FleetWise	3
2.13	Argus IDPS	4
2.14	EB tresos AutoCore	4
2.15	Airbiquity OTAmatic Software	4
2.16	K3s Kubernetes Distribution	4
2.17	Docker Engine	4
3	Supported Targets	5
4	Quality, Standards Compliance and Testing Approach	6
5	Revision History	7
	Legal information	8

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.