S12 MagniV® Mixed-Signal MCUs **S12ZVMA Family**

Integrated solution with half bridge driver (unidirectional DC-motor or other loads)


Features


DC Motor Control

Integrated LIN PHY

V_{REG} for 12 V Supply

2-ch. MOSFET Gate Driver





Product One-Pager

System in a package-Highly integrated solution ideal for mechatronic approach to DC Motors controlled by LIN or PWM command


Scalable-32-/48-pin, up to 32 KB flash, up to 150 °C Ta

High reliability-High immunity to EMI and ESD stresses, LIN 2.x compliant with +/- 8 kV ESD capability

Low system cost-Operating straight from car battery, integrated PHY for LIN, 2-channel motor control MOSFET gate pre-drivers and op-amp for current sensing to reduce BOM

Enablement-Supported by comprehensive hardware and software solution

Product Block Diagram

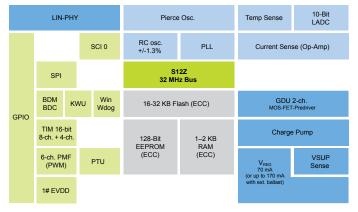


S12ZVMA Specifications

Core	S12Z; 32 MHz bus	Gate Driver	1–2-ch. FET Gate driver	
12V VREG	70 mA/170 mA	PWM	6-ch. motor cotrol PWM	
Flash	16-32 KB	PTU	Triggering ADC & PWM	
RAM	1–2 KB	ADC	7-ch., 10-bit	
EEPROM	128 B	OpAmp	1 x for current sensing	
Core	S12Z	EVDD	1-ch. 5 V/ 20 mA (source)	
Phy	LIN	Packages	32/48 LQFP	
SCI/SPI	1/1	Temperature	Up to 150 °C Ta / 175 °C Tj	
Timer	2-ch. + 2-ch., 16-bit	Op Range	3.5V – 20V	

Orderable Sample Part Numbers

Part Number	Flash	Temp Range	Package	Available
S912ZVMAL3F0MLF	32 KB	-40 to 125 °C	48-LQFP	Now
S912ZVMAL3F0WLF	32 KB	-40 to 150 °C	48-LQFP	Now
S912ZVMAL3F0MLC	32 KB	-40 to 125 °C	32-LQFP	Now

Application Example Block Diagram

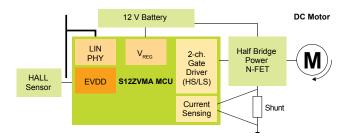

Target Applications

- DC-motor drive
- ▶ LIN based actuators
- Solenoids
- Valves
- Smart junction box
- ▶ Driving resistive or inductive loads
- Pumps (fuel/water/oil)
- Fans / blower

Enablement Tools

- ▶ Evaluation boards/hardware
- -S12ZVMAEVB
- ▶ Compiler/Debugger
 - -CodeWarrior® IDE
 - -Cosmic IDE
- LIN Stack





www.NXP.com/S12VMA