



Spatial Temporal Processing in TD-SCDMA

**Chengke Sheng
Ed Martinez**

WHITE PAPER

TPTDSCDMAWP
Rev. 0, 9/2004

Table of Contents

- 1. INTRODUCTION..... 5**
- 2. TYPES OF CHANNEL IMPULSE RESPONSE12**
 - 2.1. NON-DIRECTIONAL CHANNEL IMPULSE RESPONSE.12
 - 2.2. DIRECTIONAL CHANNEL IMPULSE RESPONSE12
- 3. ESTIMATION OF NON-DIRECTIONAL CHANNEL IMPULSE RESPONSE.....14**
- 4. ESTIMATION OF DIRECTIONAL CHANNEL IMPULSE RESPONSE.....17**
- 5. ESTIMATION OF TRANSMITTED DATA18**
- 6. SUMMARY21**

Table of Figures

FIGURE 2-1 ANTENNA ARRAY MODEL13

FIGURE 5-1 STRUCTURE OF THE SPREADING SIGNATURE CODE MATRIX18

FIGURE 5-2 STRUCTURE OF VECTOR C_d 19

FIGURE 5-3 THE STRUCTURE OF MATRIX $H_{DA}^{(k,kD)}$ 19

Terms and Acronyms

Term	Definition
CDMA	Code Division Multiple Access
JD	Joint Detection
TD-SCDMA	Time Division Synchronous CDMA
UMTS	Universal Mobile Telecommunications System
Mcps	Mega Chip Per Second

1. Introduction

1.1. Scope and Audience

This paper presents details of the spatial-temporal processing of a received TD-SCDMA signal and its channel impulse response.

This document is targeted at systems engineers who are designing TD-SCDMA systems who are interested in deploying the Motorola MRC6011 in their designs. It is also targeted to applications engineers and marketing professions who want to learn more about the broad range of applications of the Motorola RCF technology.

1.2. Executive Summary

CDMA based systems suffer from Multiple Access Interference (MAI) and it affects all users equally. FDD based systems attempt to deal with the problem by using detection schemes such as the rake receiver, however these schemes are sub-optimal because they only consider one user's signal information and do not take into account the interference from all other users in the system.

Joint Detection algorithms on the other hand are designed to process all users in parallel by including the interference information from the other users. In general Joint Detection schemes are complex and computationally intensive (complexity grows exponentially as the number of users increases) because most of the operations are matrix and vector based operations, as the number of the users increase, the sizes of the matrices and vectors increases and therefore the computation power that is required to separate the users.

TD-SCDMA however, solves this problem by limiting the number of users in a given time slot to 16, this creates a very manageable number of users that need to be processed in parallel, furthermore these users are also synchronized.

1.3. Background

In the year 1998 the Chinese Wireless Telecommunications Standards (CWTS, <http://www.cwts.org>) put forth a proposal to the International Communications Union (ITU) based on TDD and Synchronous CDMA technology (TD-SCDMA) for TDD. This proposal was accepted and approved by the ITU and became part of 3GPP in March of 2001.

TD-SCDMA was incorporated as part of the TDD mode of operation in addition to the existing TDD-CDMA mode of operation. To accommodate both modes, 3GPP now includes a "low chip rate" mode of 1.28 Mcps that corresponds to the TD-SCDMA specifications. Because of this TD-SCDMA is sometimes referred to as the low-chip rate mode of UTRA TDD.

Table 1-1 shows where TD-SCDMA fits in relationship to other 3GPP standards

3GPP		
Name	Access Mode	Chip Rate
WCDMA	FDD	3.84 Mcps
TDD-CDMA	TDD	3.84 Mcps
TD-SCDMA	TDD	1.28 Mcps

Table 1-1 TD-SCDMA in relationship to other 3G standards

2. Signal Model

2.1. TDD/TDMA

Internet based applications, media (audio and video) enabled applications and file transfers have very different bandwidth requirements for uplink and downlink traffic. TD-SCDMA does not dictate a fixed utilization of the frequency band; rather uplink and downlink resources are assigned according to traffic needs.

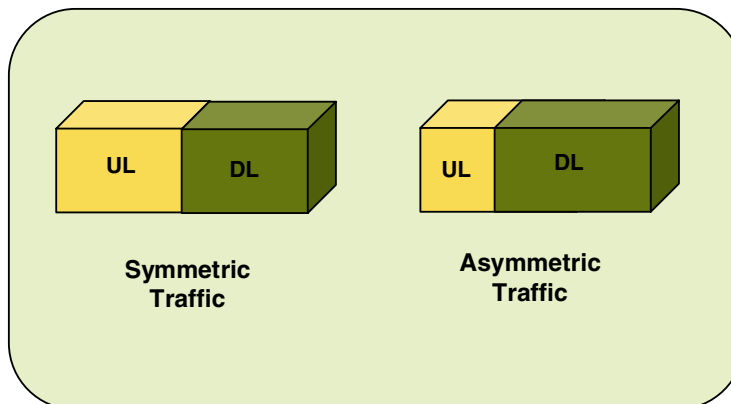


Figure 2-1 Symmetric and Asymmetric traffic support in TD-SCDMA

The variable allocation of the time slots for uplink or downlink traffic is what allows TD-SCDMA to efficiently support asymmetric traffic requirements and a variety of users. Figure 2-1 illustrates this principle where for symmetric traffic, the time slots are equally split and for asymmetric traffic the DL can use more time slots.

2.2. TD-SCDMA Frame Hierarchy

TD-SCDMA uses both unique codes and time signatures to separate the users in a given cell. The standard defines a very specific frame structure as shown in Figure 2-2. There are three different layers: the radio frame, the sub-frame and the individual time slots. Depending on the resource allocation, the configuration of the radio frames becomes different. The radio frame is 10ms; the sub-frame is 5 ms in length and is divided into 7 slots. The standard also specifies various ratios for the number of slots between these two groups in order to meet specific traffic requirements. All physical channels require a guard symbol in every time slot.

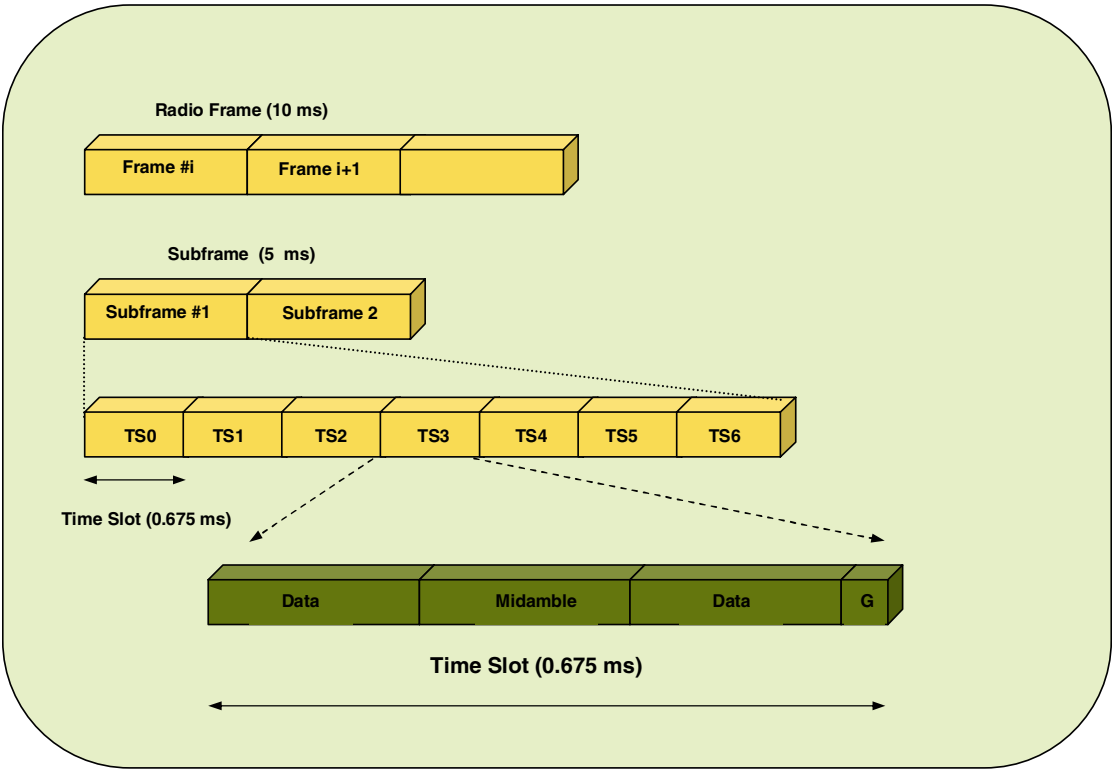


Figure 2-2 TD-SCDMA Frame Structure

2.3. TD-SCDMA Slot Structure

A TD-SCDMA time slot has been designed to fit into exactly one burst. The time slot (Figure 2-3) consists of four parts, a *midamble* with 144 chips duration, and two identical data fields with 352 chips duration at each side of the midamble and followed by a 16 chips guard period. The midamble is used by the receiver to carry out channel estimation tasks.

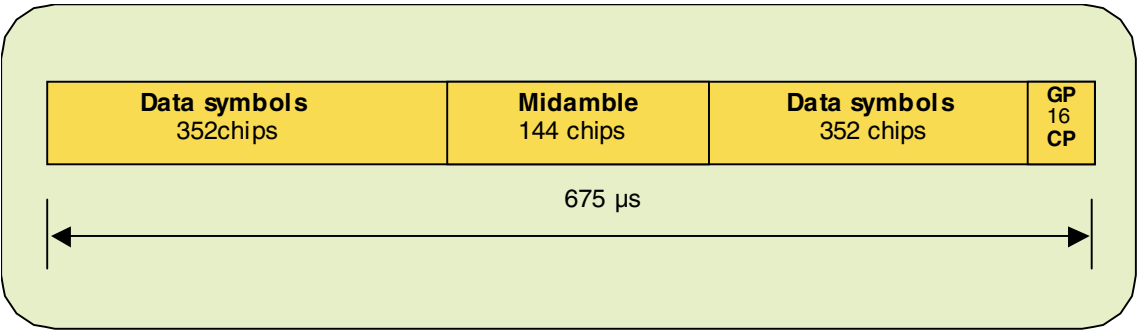


Figure 2-3 The TD-SCDMA Slot Structure

3. System Model

3.1. Channel Model

In a TD-SCDMA system, we have K users who access the channel simultaneously. On the same frequency and in the same time slot. Figure 3-1 shows a general model of a TD-SCDMA System.

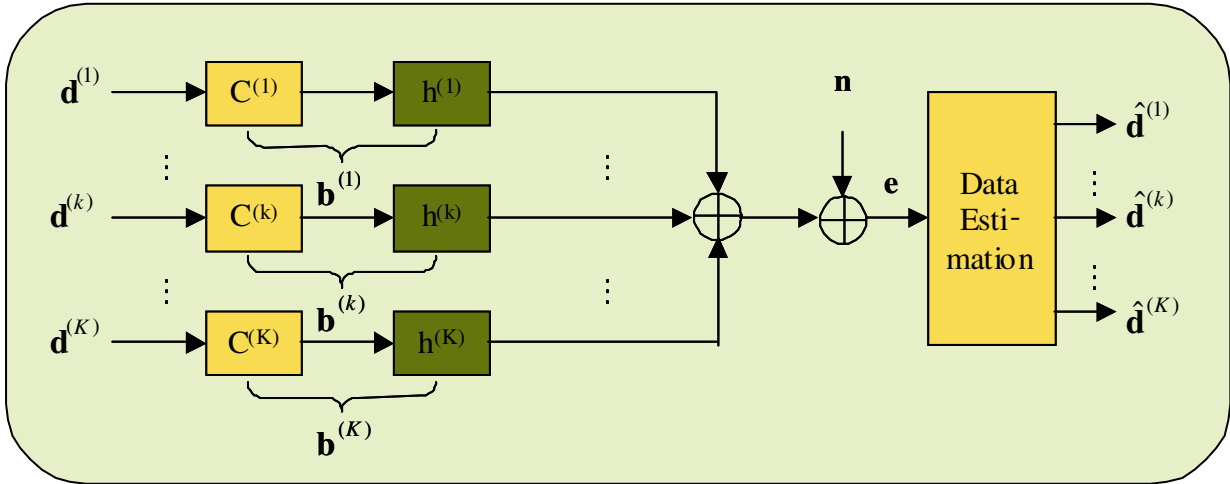


Figure 3-1 Discrete base band model of a TD-SCDMA system.

In the system of Figure 3-1 we assume that there are K_a antennas for the receiver .

The k^{th} user transmits a data symbol sequence block with N symbols:

$$\mathbf{d}^{(k)} = \left(d_1^{(k)}, d_2^{(k)} \dots d_N^{(k)} \right)^T \quad k = 1, 2, \dots, K \quad (1)$$

$$\mathbf{d}^{(k)} = \left[d_1^{(1)}, d_1^{(2)}, \dots, d_1^{(k)}, d_2^{(1)}, d_2^{(2)}, \dots, d_2^{(k)}, \dots, d_N^{(1)}, d_N^{(2)}, \dots, d_N^{(k)} \right]^T \quad (2)$$

Where N is the number of symbols in each data block.

$$\mathbf{c}^{(k)} = \left(c_1^{(k)}, c_2^{(k)} \dots c_Q^{(k)} \right)^T \quad k = 1, 2 \dots K \quad (3)$$

$\mathbf{c}^{(k)}$ is the k^{th} user signature, N is the number of symbols in each data block and Q is the spreading factor. All users are assumed to be at the same spreading factor.

Each of the K channels in the system is characterized by its impulse response

$$\mathbf{h}^{(k)} = \left[h_1^{(k)}, h_2^{(k)} \dots h_W^{(k)} \right]^T \quad k = 1, 2 \dots K \quad (4)$$

Where W is the number of taps in the channel.

Similarly, we have the noise vector for antenna k_a

$$\mathbf{n}^{(ka)} = \left[n_1^{(ka)} n_2^{(ka)} \dots n_{NQ+W-1}^{(ka)} \right]^T \quad (5)$$

and

$$\mathbf{N} = \left[\mathbf{n}^{(1)} \mathbf{n}^{(2)} \dots \mathbf{n}^{(Ka)} \right]^T \quad \mathbf{n} = \text{vec}[\mathbf{N}] \quad (6)$$

The transmission of the block on N symbols can be modeled by a system of linear equations that relates the spreading codes, the channel's input response and the impact of noise in the signal.

3.2. Received Signal Model

The received sequence received at chip rate from the k_a^{th} antenna is:

$$\mathbf{e}^{(ka)} = (e_1^{(ka)}, e_2^{(ka)}, \dots, e_{NQ+W-1}^{(ka)})^T \quad (7)$$

where Q again is the spreading factor of the data symbol and W is the number of taps in channel.

$$\mathbf{E} = \left[\mathbf{e}^{(1)}, \mathbf{e}^{(2)} \dots \mathbf{e}^{(Ka)} \right]^T \quad \mathbf{e} = \text{vec}[\mathbf{E}] \quad (8)$$

From Figure 3-1 we can see that

$$\mathbf{b}^{(k,ka)} = (b_1^{(k,ka)}, b_2^{(k,ka)}, \dots, b_{Q+W-1}^{(k,ka)})^T = \mathbf{c}(k) * \mathbf{h}^{(k,ka)} \quad (9)$$

Is the convolution of the channel input response with the corresponding spreading code. ($\mathbf{h}^{(k,ka)}$ is the channel impulse response between the user k and antenna k_a , $\mathbf{c}(k)$ is the spreading code of the user k .)

Then the we can see that the signal arriving at the receiver can be described by a linear system of equations that relate the user's signal and the receiver input:

$$\mathbf{E} = \mathbf{A}(\mathbf{I}^{(Ka)} \otimes \mathbf{d}) + \mathbf{N} \quad (10)$$

Where, $\otimes$ is the Kronecker product .

Or

$$\mathbf{e} = \mathbf{A}\mathbf{d} + \mathbf{n} \quad (11)$$

The matrix $\mathbf{A}$ is called channel matrix and is defined as

$$\mathbf{A} = \left[\mathbf{A}^{(1)} \mathbf{A}^{(2)} \dots \mathbf{A}^{(Ka)} \right]^T \quad (12)$$

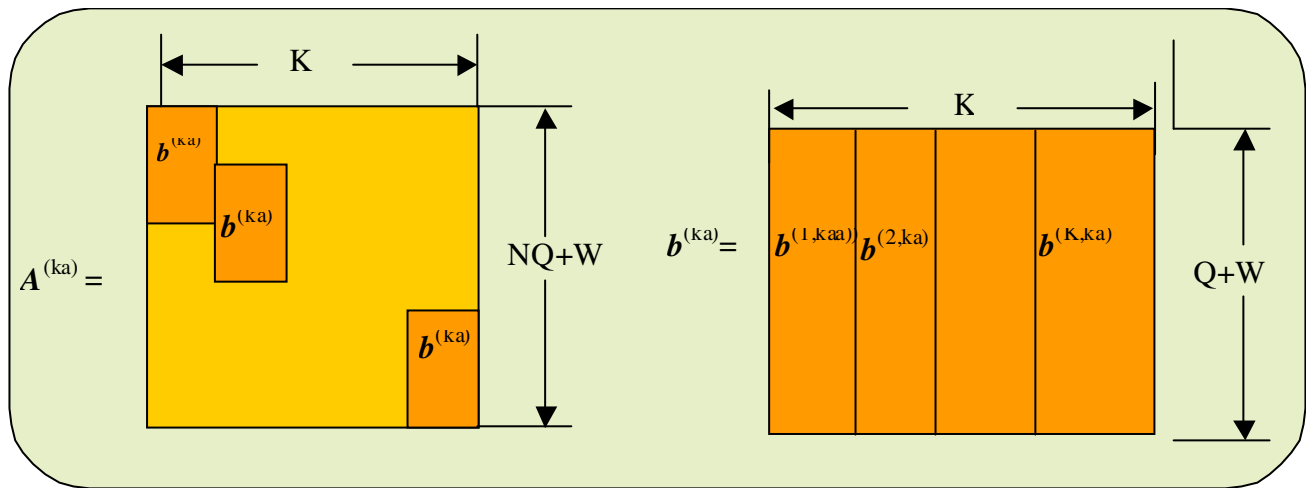


Figure 3-2 The Channel Matrix A

4. Types of Channel Impulse Response

When dealing with spatial-temporal signal processing in the TD-SCDMA, we need to identify two types of channel impulse responses – non-directional channel impulse response and directional channel impulse response.

4.1. Non-Directional Channel Impulse Response.

Let's first discuss the non-directional channel impulse response. The impulse response is defined between each individual user and its antenna. A non-directional channel response between user k and antenna ka can be modeled as a FIR filter with W taps:

$$\mathbf{h}^{(k,ka)} = [h_1^{(k,kd)}, h_2^{(k,kd)}, \dots, h_W^{(k,kd)}]^T \quad (13)$$

We can stack all of the channel impulse responses of the k users together to form the non-directional channel impulse response matrix:

$$\mathbf{H}^{(k)} = \begin{bmatrix} h_1^{(k,1)} & h_1^{(k,2)} & \dots & h_1^{(k,Ka)} \\ h_2^{(k,1)} & h_2^{(k,2)} & \dots & h_2^{(k,Ka)} \\ \vdots & \vdots & \ddots & \vdots \\ h_W^{(k,1)} & h_W^{(k,2)} & \dots & h_W^{(k,Ka)} \end{bmatrix} \quad (14)$$

Then we stack all users' matrixes together to form the system non-directional channel impulse response matrix:

$$\mathbf{H} = [\mathbf{H}^{(1)T}, \mathbf{H}^{(2)T}, \dots, \mathbf{H}^{(K)T}]$$

4.2. Directional Channel Impulse Response

The second type of channel impulse response is the *directional channel impulse response*. The directional channel impulse response is directly related to each signal path with a DoA and it is defined to be the channel impulse response between user k and a reference point:

$$\mathbf{h}_d^{(k,kd)} = [h_{d1}^{(k,kd)}, h_{d2}^{(k,kd)}, \dots, h_{dW}^{(k,kd)}]^T$$

Similarly as with the non-directional channel impulse response matrix, we have:

$$\mathbf{H}_d^{(k)} = \begin{bmatrix} h_{d1}^{(k,1)} & h_{d1}^{(k,2)} & \dots & h_{d1}^{(k,Kd(k))} \\ h_{d2}^{(k,1)} & h_{d2}^{(k,2)} & \dots & h_{d2}^{(k,Kd(k))} \\ \vdots & \vdots & \ddots & \vdots \\ h_{dW}^{(k,1)} & h_{dW}^{(k,2)} & \dots & h_{dW}^{(k,Kd(k))} \end{bmatrix} \quad (15)$$

Where $K_d(k)$ is the number of DoA paths of the k^{th} user.

$$\mathbf{H}_d = [\mathbf{H}_d^{(1)}, \mathbf{H}_d^{(2)}, \dots, \mathbf{H}_d^{(K)}] \quad (16)$$

(Note that there is no transpose operation)

There is a close link between the non-directional channel impulse response and the directional channel impulse response. The non-directional channel impulse response for a given user k and given antenna k_a is the summation of all directional channel impulse responses of the user k on the antenna k_a :

$$\mathbf{h}^{(k,ka)} = \sum_{kd=1}^{Kd(k)} e^{j\phi(k,ka,kd)} \mathbf{h}_d^{(k,kd)} \quad (17)$$

where $\phi(k,ka,kd) = \{2\pi L^{(ka)} \cos(\beta^{(k,kd)} - \alpha^{(ka)})\}/\lambda$ $k=1\dots K$ $k_a = 1\dots K_a$ and $k_d = 1\dots K_d^{(k)}$;

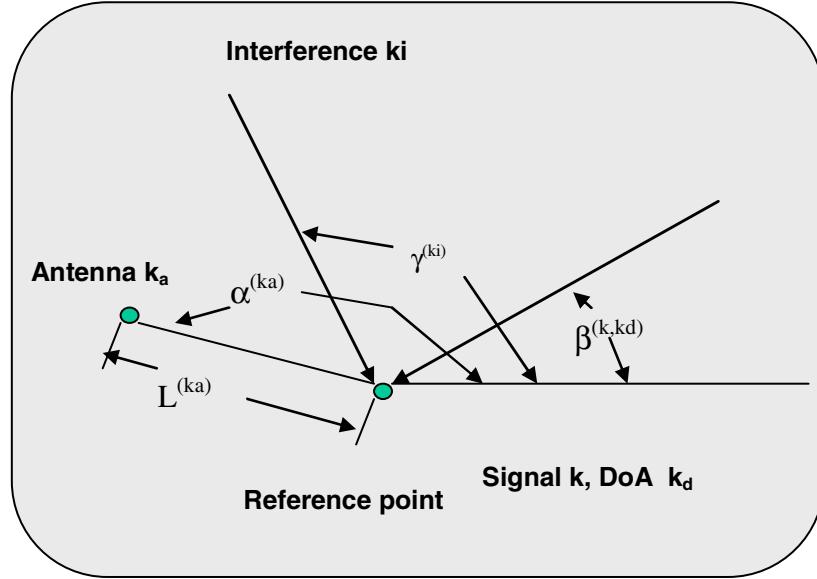


Figure 4-1 Antenna array model

For a given user k and DoA k_d , $\mathbf{e}^{j\phi(k,ka,kd)}$ ($ka = 1\dots K_a$) forms its steering vector. Thus we define:

$$\mathbf{A}^{(k)} = [\mathbf{a}^{(k,1)}, \mathbf{a}^{(k,2)}, \dots, \mathbf{a}^{(k,Kd(k))}] \quad k=1\dots, K \quad (18)$$

as the user k^{th} user's steering matrix. Then the relation between the directional channel impulse response and non-directional channel impulse response is given by

$$\mathbf{H}^{(k)} = \sum_{kd=1}^{Kd(k)} \mathbf{h}_d^{(k,kd)} \mathbf{a}^{(k,kd)T} = \mathbf{H}_d^{(k)} \mathbf{A}^{(k)T} \quad (19)$$

5. Non-directional channel impulse response

We will estimate the non-directional channel impulse response first. The estimated response can be used to estimate the DoA for each user and each path. Then based on the estimated DoA and non-directional channel impulse response, the directional channel impulse response can be derived. The estimation will be based on the midamble training sequence with length of $W+L$, where W is the maximum number of channel delay taps.

Suppose we have $\mathbf{x} = \mathbf{A}\mathbf{d} + \mathbf{n}$, where $\mathbf{n}$ is a $N \times 1$ Gaussian noise vector (it is not necessary to be white), $\mathbf{A}$ is an $N \times p$ known matrix, $\mathbf{d}$ is $p \times 1$ signal vector and $\mathbf{x}$ is $N \times 1$ observed signal, then a ML estimator of $\mathbf{d}$ can be derived as

$$\hat{\mathbf{d}} = (\mathbf{A}^H \mathbf{R}_n^{-1} \mathbf{A}) \mathbf{A}^H \mathbf{R}_n^{-1} \mathbf{x} \quad (20)$$

Actually, the estimator $\hat{\mathbf{d}}$ is an efficient MVU (Minimum Variance Unbiased estimator reaching the Cramer-Rao Lower Bound) if the vector $\mathbf{n}$ is a complex Gaussian noise vector.

Now, we define $K_a L \times 1$ column vectors: $\mathbf{e}_m^{(ka)}$ for $ka=1 \dots K_a$. $\mathbf{e}_m^{(ka)}$ is the received signal for the antenna k_a based on the last L midamble training sequence. Stack K_a vectors together to form the received $L \times K_a$ matrix

$$\mathbf{E}_m = [\mathbf{e}_m^{(1)}, \mathbf{e}_m^{(2)}, \dots, \mathbf{e}_m^{(K_a)}]$$

Similarly, we define received noise vectors and $L \times K_a$ matrix

$$\mathbf{N}_m = [\mathbf{n}_m^{(1)}, \mathbf{n}_m^{(2)}, \dots, \mathbf{n}_m^{(K_a)}]$$

Then we have

$$\mathbf{E}_m = \mathbf{G}\mathbf{H} + \mathbf{N}_m$$

where the matrix $\mathbf{G}$ is an $L \times KW$ observing matrix.

Moreover we have

$$\begin{aligned} \mathbf{e}_m &= \text{vec}\{\mathbf{E}_m\} = \text{vec}\{\mathbf{G}\mathbf{H}\} + \text{vec}\{\mathbf{N}_m\} = \text{vec}\{\mathbf{G}\mathbf{H}\mathbf{I}^{(K_a)}\} + \mathbf{n}_m \\ &= (\mathbf{I}^{(K_a)} \otimes \mathbf{G})\text{vec}\{\mathbf{H}\} + \mathbf{n}_m = (\mathbf{I}^{(K_a)} \otimes \mathbf{G})\mathbf{h} + \mathbf{n}_m \end{aligned} \quad (21)$$

where $\mathbf{I}^{(K_a)}$ is a K_a -by- K_a identity matrix, and $\otimes$ is the Kronecker product operator.

Thus, from (8), we have

$$\hat{\mathbf{h}} = \{(\mathbf{I}^{(ka)} \otimes \mathbf{G})^H \mathbf{R}_m^{-1} (\mathbf{I}^{(ka)} \otimes \mathbf{G})\}^{-1} (\mathbf{I}^{(ka)} \otimes \mathbf{G})^H \mathbf{R}_m^{-1} \mathbf{e}_m \quad (22)$$

Now we have to work out the matrix $\mathbf{G}$ and the noise covariance matrix $\mathbf{R}_m$ before the non-directional channel impulse response vector $\mathbf{h}$ can be obtained.

We define the matrix $\mathbf{G}$ to be

$$\mathbf{G} = [\mathbf{G}^{(1)}, \mathbf{G}^{(2)}, \dots, \mathbf{G}^{(K)}] \quad (23)$$

where $\mathbf{G}^{(k)}$ $k=1 \dots K$ is the $L \times W$ Toeplitz matrix of the midamble training sequence for the k th user. It is clear that the matrix $\mathbf{G}$ is pre-defined since it is composed from the given midamble training code for all K users.

For the noise covariance matrix $\mathbf{R}_m$, we have

$$\mathbf{R}_m = \begin{bmatrix} \mathbf{R}_m^{(1,1)} & \mathbf{R}_m^{(1,2)} & \dots & \mathbf{R}_m^{(1,Ka)} \\ \mathbf{R}_m^{(2,1)} & \mathbf{R}_m^{(2,2)} & \dots & \mathbf{R}_m^{(2,Ka)} \\ \vdots & \vdots & \ddots & \vdots \\ \mathbf{R}_m^{(Ka,1)} & \mathbf{R}_m^{(Ka,2)} & \dots & \mathbf{R}_m^{(Ka,Ka)} \end{bmatrix} \quad (24)$$

In (24), we have $\mathbf{R}_m^{(i,j)} = E\{\mathbf{n}_m^{(i)} \mathbf{n}_m^{(j)H}\}$

$$\begin{aligned} &= E\left\{ \sum_{ki=1}^{Ki} e^{j\phi(ki,i)} \mathbf{n}_d^{(ki)} \sum_{kj=1}^{Ki} e^{-j\phi(kj,j)} \mathbf{n}_d^{(kj)H} \right\} \\ &= E\left\{ \sum_{ki=1}^{Ki} e^{j[\phi(ki,i)-\phi(ki,j)]} \mathbf{n}_d^{(ki)} \mathbf{n}_d^{(ki)H} \right\} \\ &= \sum_{ki=1}^{Ki} e^{j[\phi(ki,i)-\phi(ki,j)]} \tilde{\mathbf{R}}_m^{(ki)} \sigma^{(ki)2} \end{aligned}$$

where $\tilde{\mathbf{R}}_m^{(ki)} = E\{\mathbf{n}_d^{(ki)} \mathbf{n}_d^{(ki)H}\} / \sigma^{(ki)2}$. Notice that $\tilde{\mathbf{R}}_m^{(ki)}$ is the same for all Ki , Then let

$$\tilde{\mathbf{R}}_m = \tilde{\mathbf{R}}_m^{(ki)} \text{ for all } ki=1 \dots Ki \text{ and } r_{i,j} = r_{i,j}^* = \sum_{ki=1}^{Ki} (\sigma^{(ki)2}) e^{j[\phi(ki,i)-\phi(ki,j)]}$$

we have

$$\mathbf{R}_m^{(i,j)} = r_{i,j} \tilde{\mathbf{R}}_m \text{ for } i,j = 1 \dots Ka \text{ and}$$

$$\mathbf{R}_m = \mathbf{R}_d \otimes \tilde{\mathbf{R}}_m \quad (25)$$

where $[\mathbf{R}_d]_{i,j} = r_{i,j}$

The matrix $\tilde{\mathbf{R}}_m$ is a temporal covariance matrix and $\mathbf{R}_d$ is spatial covariance matrix.

From (10)

$$\hat{\mathbf{h}} = \{(\mathbf{I}^{(ka)} \otimes \mathbf{G})^H \mathbf{R}_m^{-1} (\mathbf{I}^{(ka)} \otimes \mathbf{G})\}^{-1} (\mathbf{I}^{(ka)} \otimes \mathbf{G})^H \mathbf{R}_m^{-1} \mathbf{e}_m$$

since

$$\begin{aligned} (\mathbf{I}^{(ka)} \otimes \mathbf{G})^H \mathbf{R}_m^{-1} &= (\mathbf{I}^{(ka)} \otimes \mathbf{G})^H (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_m^{-1}) \\ &= \mathbf{R}_d^{-1} \otimes \mathbf{G}^H \tilde{\mathbf{R}}_m^{-1} \end{aligned}$$

$$\begin{aligned}
 \hat{\mathbf{h}} &= \{ \mathbf{R}_d^{-1} \otimes \mathbf{G}^H \tilde{\mathbf{R}}_m^{-1} \mathbf{G} \}^{-1} (\mathbf{R}_d^{-1} \otimes \mathbf{G}^H \tilde{\mathbf{R}}_m^{-1}) \mathbf{e}_m \\
 &= \{ \mathbf{R}_d \otimes (\mathbf{G}^H \tilde{\mathbf{R}}_m^{-1} \mathbf{G})^{-1} \} (\mathbf{R}_d^{-1} \otimes \mathbf{G}^H \tilde{\mathbf{R}}_m^{-1}) \mathbf{e}_m \\
 &= \{ \mathbf{I}^{(ka)} \otimes (\mathbf{G}^H \tilde{\mathbf{R}}_m^{-1} \mathbf{G})^{-1} \mathbf{G}^H \tilde{\mathbf{R}}_m^{-1} \} \mathbf{e}_m \\
 &= \{ \mathbf{I}^{(ka)} \otimes \mathbf{M}_m \} \mathbf{e}_m
 \end{aligned}$$

Where

$$\mathbf{M}_m = (\mathbf{G}^H \tilde{\mathbf{R}}_m^{-1} \mathbf{G})^{-1} \mathbf{G}^H \tilde{\mathbf{R}}_m^{-1}$$

$$\text{If } \tilde{\mathbf{R}}_m = \mathbf{I} \text{ then } \mathbf{M}_m = (\mathbf{G}^H \mathbf{G})^{-1} \mathbf{G}^H$$

6. Directional channel impulse response

The directional channel impulse response is based on each directional signal path. It is the impulse response between a given directional signal path and reference point. Based on (7)

$$\mathbf{H}^{(k)} = \sum_{kd=1}^{Kd(k)} \mathbf{h}_d^{(k,kd)} \mathbf{a}^{(k,kd)T} = \mathbf{H}_d^{(k)} \mathbf{A}^{(k)T}$$

if $\mathbf{H}^{(k)}$ and $\mathbf{A}^{(k)T}$ can be obtained or estimated, then $\mathbf{H}_d^{(k)}$ can be derived.

From

$$\mathbf{e}_m = \text{vec}\{\mathbf{G} \mathbf{H}\} + \mathbf{n}_m = \mathbf{G}_d \mathbf{h}_d + \mathbf{n}_m$$

we have the ML estimator of $\mathbf{h}_d$

$$\hat{\mathbf{h}}_d = (\mathbf{G}_d^H (\mathbf{R}_d \otimes \tilde{\mathbf{R}}_m)^{-1} \mathbf{G}_d)^{-1} \mathbf{G}_d^H (\mathbf{R}_d \otimes \tilde{\mathbf{R}}_m)^{-1} \mathbf{e}_m$$

where $\mathbf{X}_m^{-1} = (\mathbf{G}_d^H (\mathbf{R}_d \otimes \tilde{\mathbf{R}}_m)^{-1} \mathbf{G}_d)^{-1}$ is the decorrelator filter and $\mathbf{G}_d^H (\mathbf{R}_d \otimes \tilde{\mathbf{R}}_m)^{-1}$ is the spatial-temporal whitening matched filter and

$$\mathbf{G}_d^H (\mathbf{R}_d \otimes \mathbf{R}_m)^{-1} = \begin{bmatrix} (\mathbf{A}^{(1)H} \otimes \mathbf{G}^{(1)H}) \otimes (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_m^{-1}) \\ \vdots \\ (\mathbf{A}^{(K)H} \otimes \mathbf{G}^{(K)H}) \otimes (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_m^{-1}) \end{bmatrix} = \begin{bmatrix} (\mathbf{A}^{(1)H} \mathbf{R}_d^{-1} \otimes \mathbf{G}^{(1)H} \tilde{\mathbf{R}}_m^{-1}) \\ \vdots \\ (\mathbf{A}^{(K)H} \mathbf{R}_d^{-1} \otimes \mathbf{G}^{(K)H} \tilde{\mathbf{R}}_m^{-1}) \end{bmatrix}$$

Then we have

$$\mathbf{G}_d^H (\mathbf{R}_d \otimes \mathbf{R}_m)^{-1} \text{vec}\{\mathbf{E}_m\} = \begin{bmatrix} \text{Vec}\{\mathbf{G}^{(1)H} \mathbf{R}_m^{-1} \mathbf{E}_m (\mathbf{R}_d^{-1})^* \mathbf{A}^{(1)*}\} \\ \text{Vec}\{\mathbf{G}^{(2)H} \mathbf{R}_m^{-1} \mathbf{E}_m (\mathbf{R}_d^{-1})^* \mathbf{A}^{(2)*}\} \\ \vdots \\ \text{Vec}\{\mathbf{G}^{(K)H} \mathbf{R}_m^{-1} \mathbf{E}_m (\mathbf{R}_d^{-1})^* \mathbf{A}^{(K)*}\} \end{bmatrix}$$

Where $\mathbf{G}^{(k)H} \mathbf{R}_m^{-1}$ is the temporal whitening matched filter and $(\mathbf{R}_d^{-1})^* \mathbf{A}^{(k)*}$ is the spatial whitening matched filter of the user k.

We define the spatial whitening matched filter

$\mathbf{W}^{(k)} = (\mathbf{R}_d^{-1})^* \mathbf{A}^{(k)*} = [\mathbf{w}^{(k,1)}, \mathbf{w}^{(k,2)}, \dots, \mathbf{w}^{(k,Kd(k))}]$, thus $\mathbf{w}^{(k,kd)}$ is beamformed for the k_d 's DoA.

7. Estimation of transmitted data

Based on the directional channel impulse response, we will estimate the transmitted data. As we will see, beam-forming will be generated for each DoA path and all the DoA paths of the same user will be coherently combined to enhance the system's performance.

We define vector $\mathbf{d}$ as the transmitted data column vector of length KN for all K users;

$$\mathbf{d} = [\mathbf{d}^{(1)T}, \mathbf{d}^{(2)T}, \dots, \mathbf{d}^{(K)T}]^T \quad \text{where } \mathbf{d}^{(k)T} \text{ is user } k\text{'s transmitted data vector of length } N$$

Define matrix $\mathbf{E}$ the received signal matrix with dimension $(NQ+W-1) \times K_a$:

$\mathbf{E} = [\mathbf{e}^{(1)}, \mathbf{e}^{(2)}, \dots, \mathbf{e}^{(K_a)}]$, where $\mathbf{e}^{(k_a)}$ is the received signal vector of length $NQ+W-1$ from antenna k_a . And we also define $\mathbf{e} = \text{vec}\{\mathbf{E}\}$ and the combined noise vector

$$\mathbf{n} = [\mathbf{n}^{(1)T}, \mathbf{n}^{(2)T}, \dots, \mathbf{n}^{(K)T}]^T \quad \text{of length } (NQ+W-1)K_a:$$

The data $\mathbf{d}$ has to be spreaded by the special signature code before it can be transmitted, thus we define the spreading signature code matrix for user k :

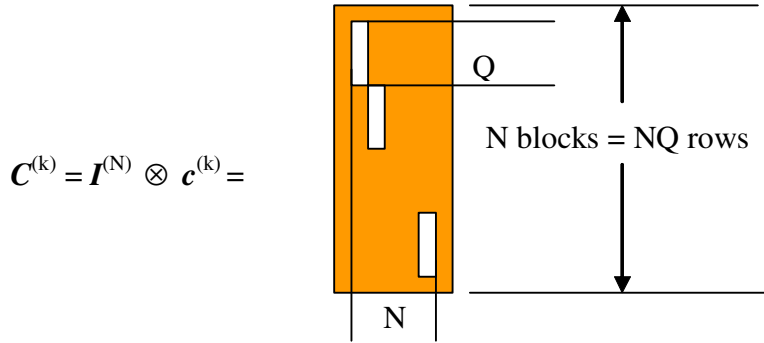


Figure 7-1 Structure of the Spreading signature code matrix

Where $\mathbf{c}^{(k)}$ is the special signature code for user k , $k=1 \dots K$. Stack all $\mathbf{C}^{(k)}$ $k=1 \dots K$ together to form the combined signature code matrix

$$\mathbf{C} = \text{blockdiag}[\mathbf{C}^{(1)}, \mathbf{C}^{(2)}, \dots, \mathbf{C}^{(K)}]$$

The spreaded data can be written as:

$$\mathbf{C} \mathbf{d} = \text{blockdiag}[\mathbf{C}^{(1)}, \mathbf{C}^{(2)}, \dots, \mathbf{C}^{(K)}] [\mathbf{d}^{(1)T}, \mathbf{d}^{(2)T}, \dots, \mathbf{d}^{(K)T}]^T$$

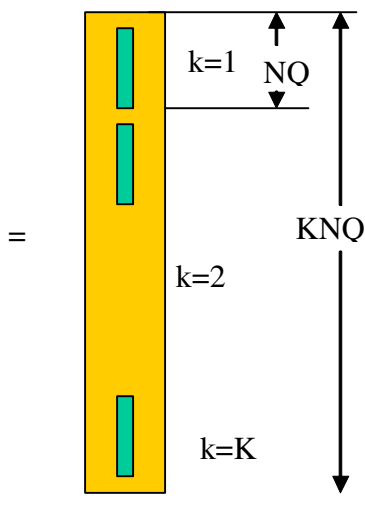


Figure 7-2 Structure of Vector $\mathbf{C}\mathbf{d}$

The received signal vector $\mathbf{e}$ is the transmitted spreaded data pass the directional channel plus the noise:

$$\mathbf{e} = \mathbf{A}_d \mathbf{H}_{da} \mathbf{C} \mathbf{d} + \mathbf{n}$$

Where $\mathbf{A}_d = \mathbf{A} \otimes \mathbf{I}^{(NQ+W-1)}$, $\mathbf{A} = [\mathbf{A}^{(1)}, \mathbf{A}^{(2)}, \dots, \mathbf{A}^{(K)}]$ and

$$\mathbf{H}_{da} = \text{blockdiag}[\mathbf{H}_{da}^{(1)}, \mathbf{H}_{da}^{(2)}, \dots, \mathbf{H}_{da}^{(K)}]$$

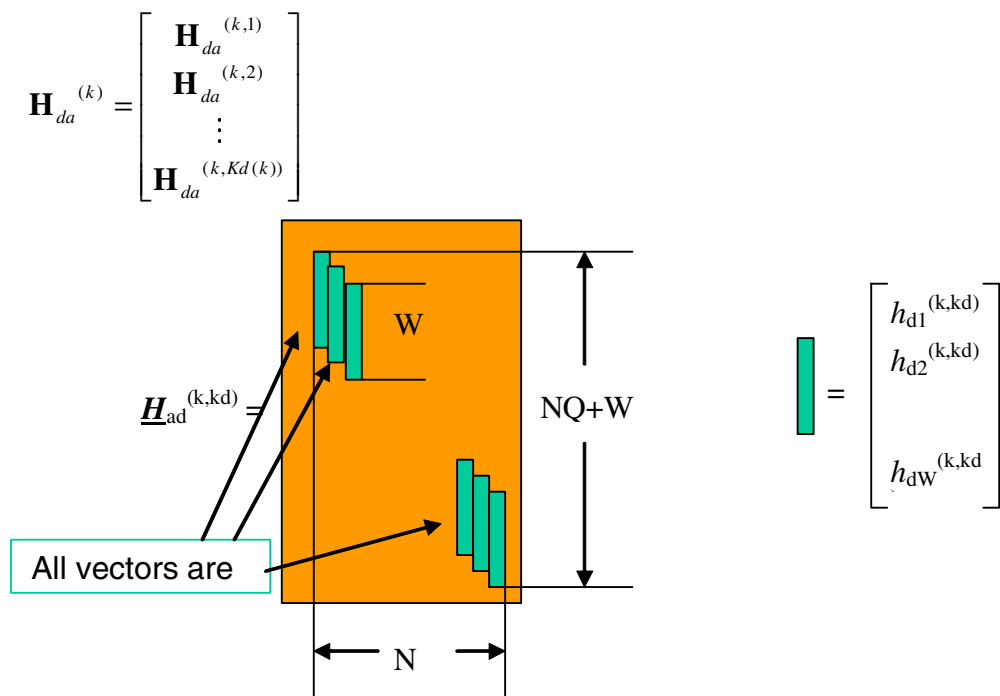


Figure 7-3 The structure of matrix $\mathbf{H}_{da}^{(k,kd)}$

Then based on the ML rule, we can estimate transmitted data:


$$\begin{aligned}\hat{d} &= (\mathbf{C}^H \mathbf{H}_{da}^H \mathbf{A}_d^H (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) \mathbf{A}_d \mathbf{H}_{da} \mathbf{C})^{-1} \mathbf{C}^H \mathbf{H}_{da}^H \mathbf{A}_d^H (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) \mathbf{e} \\ &= \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H \mathbf{A}_d^H (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) \mathbf{e}\end{aligned}$$

where $\mathbf{X} = (\mathbf{C}^H \mathbf{H}_{da}^H \mathbf{A}_d^H (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) \mathbf{A}_d \mathbf{H}_{da} \mathbf{C})^{-1}$ is a zero force equalizer.

Since $\mathbf{A}_d^H (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) = (\mathbf{A}^H \otimes \mathbf{I}^{(NQ+W-1)}) (\mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) = \mathbf{A}^H \mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}$

$$\hat{d} = \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H (\mathbf{A}^H \mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) \text{vec}\{\mathbf{E}\} = \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H \text{vec}\{\tilde{\mathbf{R}}_n^{-1} \mathbf{E} (\mathbf{R}_d^{-1})^T \mathbf{A}^*\}$$

We define

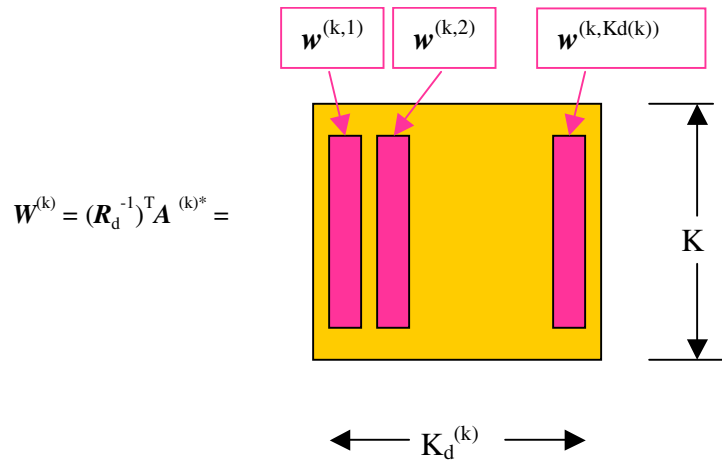

As the weight matrix for the user k and

$\mathbf{W} = (\mathbf{R}_d^{-1})^T \mathbf{A}^* = [\mathbf{w}^{(1,1)}, \dots, \mathbf{w}^{(1,Kd(1))}, \dots, \mathbf{w}^{(K,1)}, \dots, \mathbf{w}^{(K,Kd(K))}]$ is the combined antenna weight matrix for all K users. Then the combined beam output is

$$\mathbf{Z} = \mathbf{E} \mathbf{W} = [\mathbf{y}^{(1,1)}, \dots, \mathbf{y}^{(1,Kd(1))}, \dots, \mathbf{y}^{(K,1)}, \dots, \mathbf{y}^{(K,Kd(K))}], \text{ where } \mathbf{y}^{(k,kd)} = \mathbf{E} \mathbf{w}^{(k,kd)}$$

$$\begin{aligned}\hat{d} &= \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H (\mathbf{A}^H \mathbf{R}_d^{-1} \otimes \tilde{\mathbf{R}}_n^{-1}) \text{vec}\{\mathbf{E}\} = \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H \text{vec}\{\tilde{\mathbf{R}}_n^{-1} \mathbf{E} \mathbf{W}\} \\ &= \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H \text{vec}\{\tilde{\mathbf{R}}_n^{-1} \mathbf{Z}\}\end{aligned}$$

Since $\text{vec}\{\tilde{\mathbf{R}}_n^{-1} \mathbf{Z}\} = \text{vec}\{\tilde{\mathbf{R}}_n^{-1} \mathbf{Z} \mathbf{I}^{(Kd)}\} = (\mathbf{I}^{(Kd)} \otimes \tilde{\mathbf{R}}_n^{-1}) \text{vec}\{\mathbf{Z}\}$, then

$$\hat{d} = \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H (\mathbf{I}^{(Kd)} \otimes \tilde{\mathbf{R}}_n^{-1}) \text{vec}\{\mathbf{Z}\}$$

is the estimate of the transmitted data.

$$= \mathbf{X} \mathbf{C}^H \mathbf{H}_{da}^H (\mathbf{I}^{(Kd)} \otimes \tilde{\mathbf{R}}_n^{-1}) [\mathbf{y}^{(1,1)T}, \dots, \mathbf{y}^{(1,Kd(1))T}, \dots, \mathbf{y}^{(K,1)T}, \dots, \mathbf{y}^{(K,Kd(K))T}]$$

8. Summary

In this paper, the spatial-temporal processing of a received TD-SCDMA signal is presented. The directional channel impulse response is estimated based on the non-directional response. It is shown in this paper that the ML estimator of the transmitted data utilizes both the temporal and spatial information of the signal and that the estimator consists of a beam former followed by a zero-force equalizer.

References

1. [http:// www.3gpp.org](http://www.3gpp.org)
2. <http://www.tdscma.org>.
3. Josef Johannes Blanz, Apostolos Papathanassiou, Martin Haardt, Ignasi Furio and Paul Walter Baier, "*Smart Antennas for Combined DoA and Joint Channel Estimation in Time-Slotted CDMA Mobile Radio Systems with Joint Detection*" IEEE Tran. On vehicular tech. Vol.49, No.2, March 2000.

How to Reach Us:

Home Page:

www.freescale.com

E-mail:

support@freescale.com

USA/Europe or Locations not listed:

Freescale Semiconductor
Technical Information Center, CH370
1300 N. Alma School Road
Chandler, Arizona 85224
+1-800-521-6274 or +1-480-768-2130
support@freescale.com

Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GMBH
Technical Information Center
Schatzbogen 7
81829 München, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
support@freescale.com

Japan:

Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064, Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:

Freescale Semiconductor Hong Kong Ltd.
Technical Information Center
2 Dai King Street
Tai Po Industrial Estate
Tai Po, N.T. Hong Kong
+800 2666 8080

For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
1-800-441-2447 or 303-675-2140
Fax: 303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. StarCore is a trademark of StarCore LLC. All other product or service names are the property of their respective owners.

© Freescale Semiconductor, Inc. 2004.