

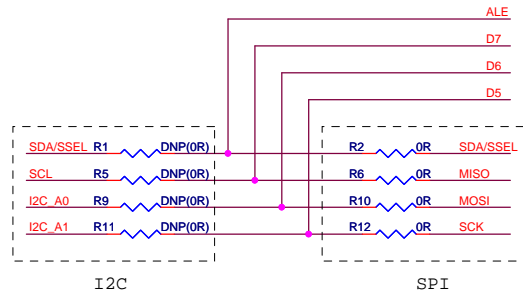
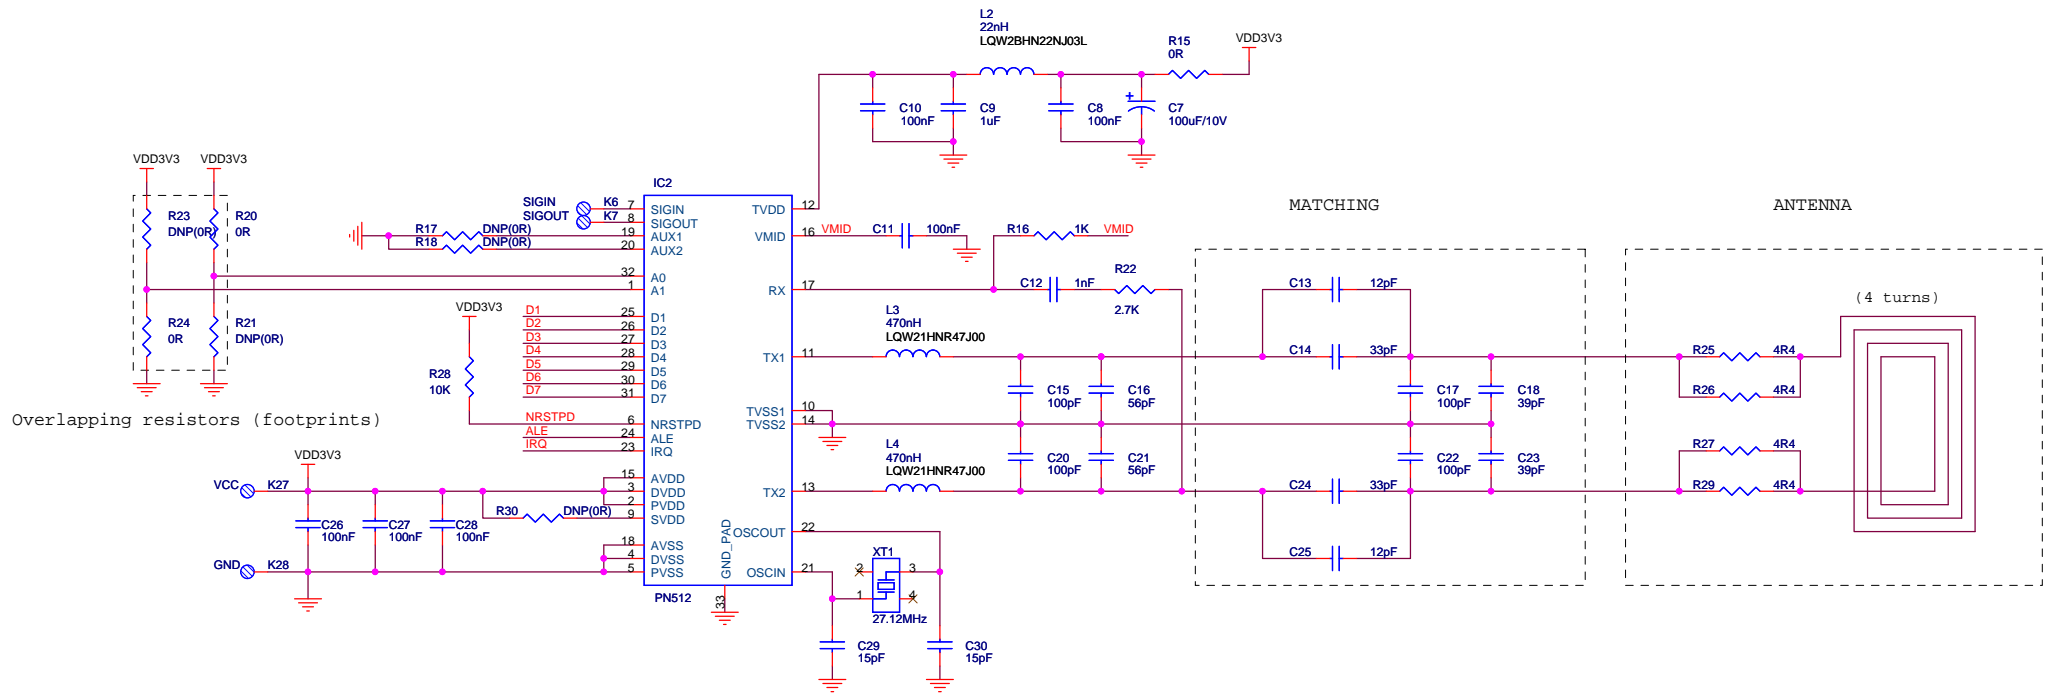





INTERFACE CONFIG
(Overlapping resistors (footprints))



I2C ADDRESS CONFIG
(Overlapping resistors (footprints))

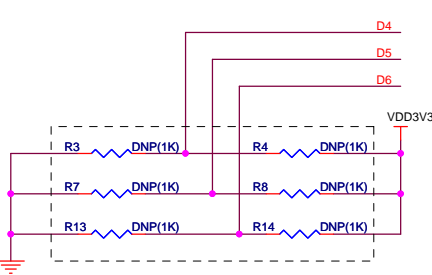

Overlapping resistors (footprints)

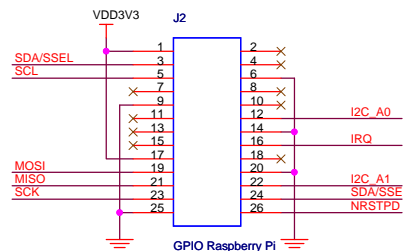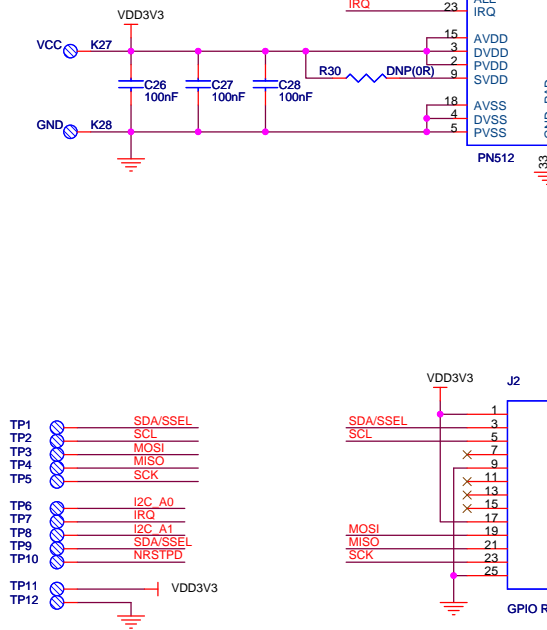

SPI Interface:
- use pin 24 for SSEL (set port for output)
- don't use pin 3 (set port for input or three state)

I2C Interface:
- use pin 3 for SDA (set port for output)
- don't use pin 24 (set port for input or three state)

Title			Interface
Size	A3	Document Number	EXPLORE-NFC V1.6
Date:	Monday, December 09, 2013	Sheet	1 of 1